


CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n= 2900 min⁻¹

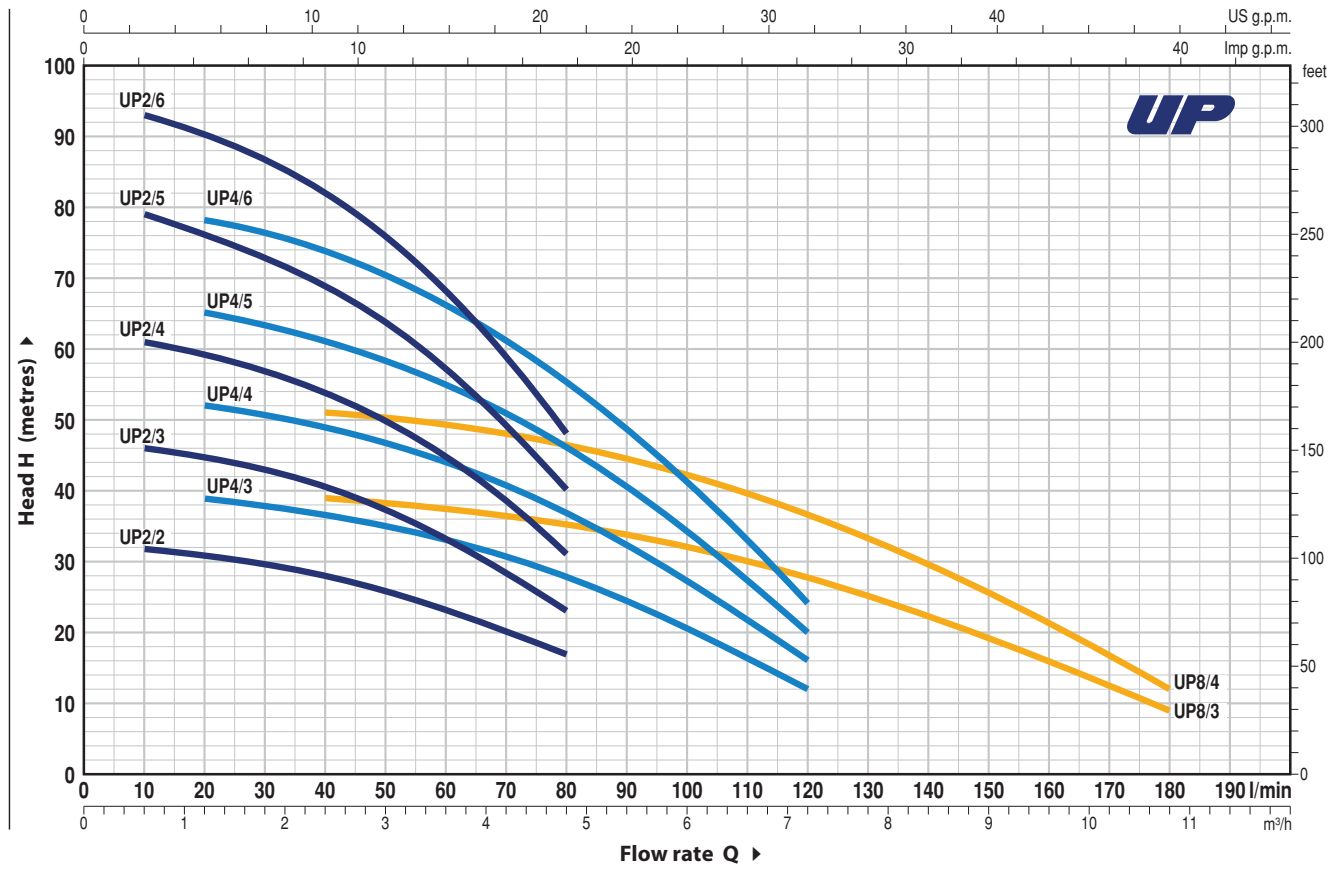

MODEL		POWER (P ₂)		Q	H metres											
Single-phase	Three-phase	kW	HP		m ³ /h	0	0.6	1.2	2.4	3.6	4.8	6.0	7.2	8.4	9.6	10.8
				l/min	0	10	20	40	60	80	100	120	140	160	180	
UPm 2/2-GE	UP 2/2	0.37	0.5		33	32	31	28	23.5	17						
UPm 2/3-GE	UP 2/3	0.55	0.75		48	46	44.5	40.5	33.5	23						
UPm 2/4-GE	UP 2/4	0.75	1		63	61	59	54	45	31						
UPm 2/5-GE	UP 2/5	1.1	1.5		81	79	75.5	68.5	57.5	40						
UPm 2/6-GE	UP 2/6	1.5	2		95	93	90	82	68.5	48						
UPm 4/3-GE	UP 4/3	0.55	0.75	H metres	40	-	39	37	33	28	20.5	12				
UPm 4/4-GE	UP 4/4	0.75	1		53	-	52	49	44	37	27.5	16				
UPm 4/5-GE	UP 4/5	1.1	1.5		67	-	65	61.5	55	46.5	34	20				
UPm 4/6-GE	UP 4/6	1.5	2		80	-	78	74	66	56	41	24				
UPm 8/3-GE	UP 8/3	1.1	1.5		40	-	-	39	37.5	35.2	32	27.8	22.2	16	9	
UPm 8/4-GE	UP 8/4	1.5	2		52	-	-	51	49.2	46.5	42	36.5	29.5	21.2	12	

Q = Flow rate H = Total manometric head

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.

⇒ Single-phase pumps without float switch on request

